


DEPLOYABLE TACTICAL FO OUTDOOR CABLES

FIELD DEPLOYABLE TACTICAL FO ASSEMBLIES

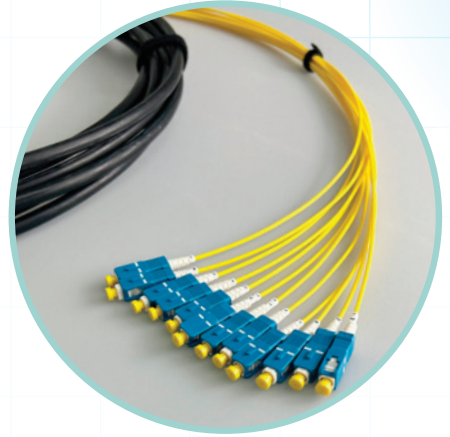

Fibre Systems Tactical cable reels provide a simple solution for deploying and retrieving fibre optic and communication cables. Available in Multimode and Singlemode options with various connectors, these cables support 2 to 12 cores, feature aramid strength members, and have PU jackets for outdoor durability. Ideal for communication, broadcast, and pro audio use, tactical assemblies are supplied on reels for quick deployment, retrieval, and transport.

FEATURES & APPLICATIONS

- Rugged fibre cable assembly, up to 500m
- Compatible with SC, LC, MPO, ODVA connectors
- Durable cable/assembly protection
- Simplified transport and deployment
- Industrial networks
- Broadcast/Pro AV networks
- LAN/Campus networks
- Mining/harsh environment cabling
- Plug n Play solutions
- Typical RL < -55dB and IL < 0.25dB



DEPLOYABLE TACTICAL FO OUTDOOR CABLES

Reel Type

PART #						
		Schill GT-235	Schill GT-310	Schill GT-380	Schill GT-450	Schill HT-582
REEL MATERIAL		Special Rubber	Special Rubber	Special Rubber	Special Rubber	Steel
REEL CAPACITY MAX CABLE LENGTH (M)	@ 3.0mm	285 rec 355 max	525 rec 656 max	1024 rec 1284 max	1371 rec 1714 max	N/A
	@ 6.0mm	71 rec 88 max	131 rec 164 max	257 rec 321 max	342 rec 428 max	694 rec 867 max
	@ 8.5mm	35 rec 44 max	65 rec 81 max	128 rec 160 max	170 rec 213 max	345 rec 542 max

Ordering Information

Connector A and B
LC : LC
SC : SC
ST : ST
MTP : MT
ODVA SC : OSC
ODVA LC DX : OLC

Cable type
Distribution : D
Breakout : B
Armoured : A

Reel type
GT235RM : 1
GT310RM : 2
GT380RM : 3
GT450RM : 4
HT582RM : 5
Other : xx

FBD-04-LCLC-S2-D-200-1

Fibre Count
01
02
04
06
12

Fibre type
OS2 : S2
OM4 : M4
OM1 : M1

Length (m)



CONTACT:

Unit 4 / 277 Lane Cove Road, Macquarie Park, NSW 2113
Call: +61 2 8553 0600 Email: sales@fibresystems.com.au
www.fibresystems.com.au

Fibre Systems is an Australian-owned provider of ruggedised, high-performance fibre optic cable systems.
© 2025, Fibre Systems, all rights reserved. Specifications are subject to change without notice.

008 Revision 01, 11.25

